


Technical specification CC Amstel Main Hall

CC Amstel is a new build – 2018 – theatre. The main hall is a black box auditorium. It is equipped with lighting bridges and 7 flybars. **Please mark this! CC Amstel is a fully led lighted theatre!**

The loadingdock is on ground level, suitable for vehicles up to 12 m. The loadingdock has an elevating plateau that can reach trailer height. **Loadingdock is not a parkingplace for personal use. Trucks only.** Parkingfee in the area around theatre is due from Monday till Saturday.

Unfortunately, there is no workshop.
There is no possibility for storage.

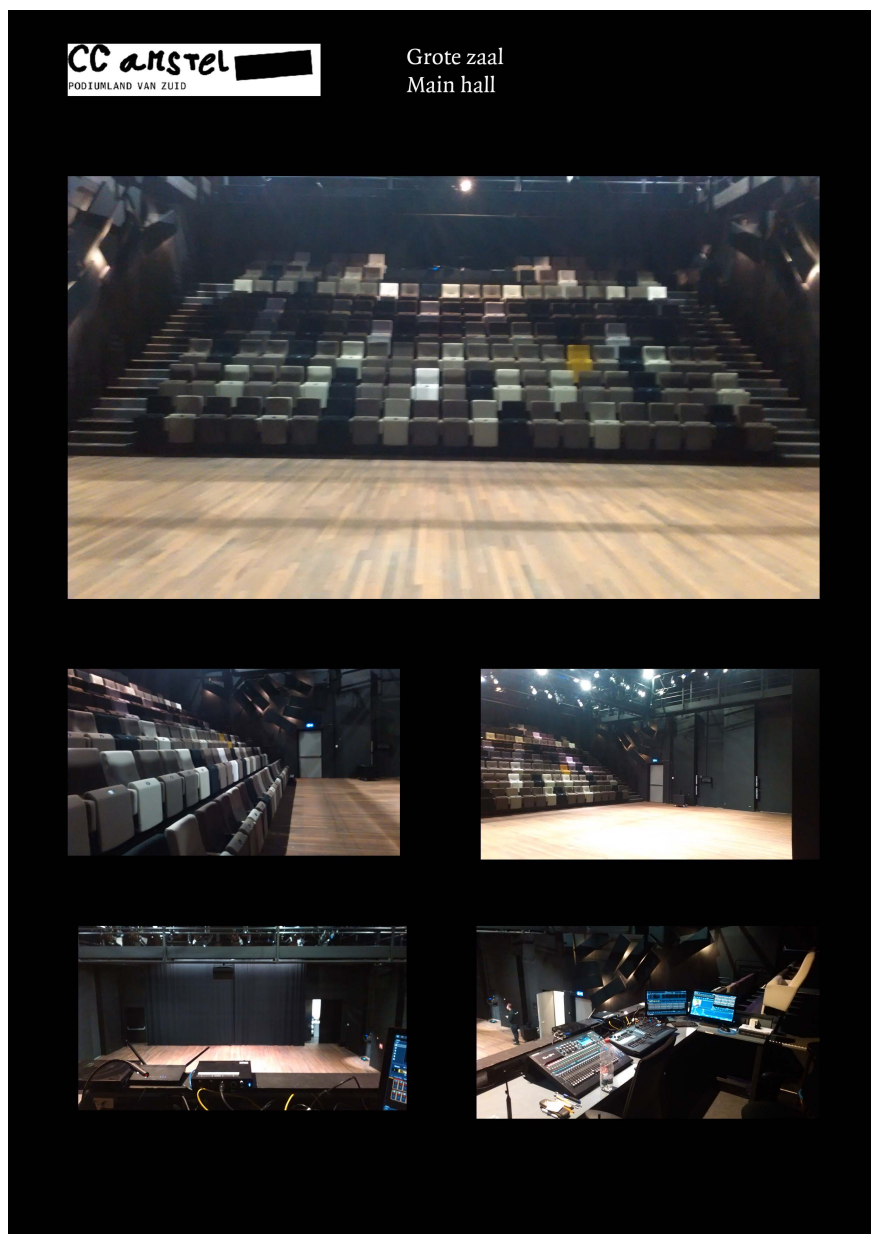

Standard workinghours

Start 10.00 uur, Lunch 12.30 - 13.00, Dinnertime 17.00 - 19.00
Dinerbreak for technicians is from 17.00 to 19.00. If work continues during this timeframe a dinerfee for the workers will be applied. That will cost €15,-- per technician (tax included).

Seating The theatre tribune has a capacity of 154 seats. Furthermore 50 chairs are available. As well as separate low benches. At least one seat is for the usher.

Dimensions

width:	wall to wall 13 meters. within the bridges 10 meters with black sidecurtains 11 meters
deep:	9 meters. Within bridges 8.5 meters
height:	7 meters 5 meters under the bridges (see download 'afmetingen cc Amstel')

Bridges frontal bridge and portal bridge are connected to bridges along the sides. No bridge at the back.

& flybars The venue has a computer controlled flying system, supplied by ASM with multiple control points on stage. Operation of the fly system is restricted to CC Amstel staff only. According to Dutch legislation all overhead rigging must confirm to NPR8020-10.

Fixated lateral bars:

- Flybar 20 cm from back wall for cyclorama. Flybar is 11 m. wide.
- Black backdrop with rails in flybar on 40 cm from back wall, 11 m. wide.
- Bar with asymmetric cyclo's 90 cm from back wall. 10 m. wide.

Adjustable bars:

- 3 bars adjustable from portal bridge to back wall. 10 m. wide.
- 1 adjustable bar between frontal bridge and portal bridge.

Specs for bars: Max load 300 kg, point load under steel 150 kg. Point load between steels 70 kg. Point load end of bar 50 kg. All bars are certified class A.
Topmark adjustable bars: 6.8 m. lowmark adjustable bars: 0.3 m.

Floor Wooden floor (Keruing). No nails, no screws please.
Cable gutters on side and back of stage.
Four ancorpoints in floor (check with staff in advance)
Marley dancefloor, black.

Masking Black curtain on both sides of the stage, on rail. They can move out - into the wall.
5 legs on either side possible, adjustable on rail. Can be taken out.

Black backdrop on railsystem.
Cyclorama 10.5 m. wide, 6 m. high, with border of 1 m.

Accomodation

2 dressingrooms available, each with toilet and shower.
Kitchenette. Ironing-set, coffeemaker, fridge, microwave, basic
dinnerware and cutlery available.

Rental prices: some equipment can be subject to rentalprices,
[see pricelist down to this document.](#)

Lighting

CC Amstel is being built as a fully led lighted theatre not only to use the latest technical standard but foremost to bring a low energy and environmental friendly alternative. This makes careful preparation for our guests necessary. Please contact us and ask whatever you would like to know. We will do our best to make the build of the show like in any other theatre. Beside our led equipment, conventional lighting is possible by the use of several dimblocks. The amount of conventional fixtures in store however is limited. Conventional light is powered by shuko cables and multiblocks. [See download: 'lichtplan cc Amstel +dmx nrs'](#)

DMX nrs 1 t/m 93 are free in patch. download DMX patch pdf.

Console ETC Ion Xe 20, 2 x touchscreen. CAT5e

Dimmers In bridges 2 x 6 ch TTL Dimmypack
On floor 2 x 12 ch TTL Dimblock

Fixtures fixated in frontal bridge:
8 ETC Lustr 2 zoom 30'
2 ETC Lustr 2 zoom 50'

fixated in portalbridge:
8 ETC Lustr 2 Fresnel
2 ETC Lustr 2 zoom 50

fixated backlight:
5 ETC Lustr 2 Fresnel

fixated cyclo:
6 ETC Lustr 2 cyclo

side bridges:

10 ETC Lustr 2 Fresnel
10 ETC Lustr 2 zoom 50'

adjustable:

5 ETC Lustr 2 Fresnel
2 ETC Lustr 2 zoom 50'
8 ETC Lustr 2 zoom 30'
12 Ledpar Robe Parfect 150
8 led striplight ETC Coloursource linear 2

Conventional fixtures:

6 ADB 1 Kw PC
6 Strand 1 Kw Pc
10 Par 64 medium

Lighttowers 6 extendable 190 x 600 x400

Lowstands 12

Genielift Alp 8 -1000

Stage elements

9 1 x 2 meter, can be set on 20 cm, 40, or 60 cm hight.

Video

beamer 1 Panasonic PT-DZ780 7000 lmn **Mark! Costs for rental**
2 Epson EMP TW 600 3200 lmn **Mark! Costs for rental**

FX

Smoke 1 Rosco vapour plus **Mark! Costs for rental**

Hazer 1 ADJ Entourage hazer **Mark! Costs for rental**

Sound

Piano zwarte Kawai **Mark! Costs of tuning**

Console Allan & Heath QU 24 with digital snake

Patch stage right and left, CAT5e

System Top LR hanging on portalbridge D&B E12
 Center cluster on portalbridge D&B E12-D
 Frontfill LR D&B E5
 Sub D&B E15X

Amps D&B 10 D, 30 D

Monitor 4 Yamaha DXR8 active

Mike's 6 Shure beta 58
 4 Shure beta 57
 2 Rode NT2-A

2 Rode NTG4
 2 Neumann KM 184

wireless:

Mark! Costs for rental

2 Shure Handheld beta 58
 4 Shure beltack + MX53

Mikestands 10 High
 2 Low

Di's 3 Klark technik DN 100
 1 Klark technik DN 200 (stereo)

Powersupply

All 3-phase supplies are CEE red: 230/400V 50Hz - 3 phases, neutral and earth.

On floor mainconnectors:
 1 63 Amp for light
 2 32 Amp for light
 1 32 Amp for sound
 1 16 Amp for machines

In bridge mainconnectors:
 4 32 Amp for light
 4 32 Amp for rigging
 2 32 Amp for sound

	230 V:	
On floor	4 groups 16 A for light	
	2 groups 16 A for sound	
	2 groups 16 A for general purpose	
In bridge	6 groups 16 A for light	
	2 groups 16 A tbv vaste spanning	
In Foyer	1	32 Amp for light
	1	16 A geluid

Safety

Equipment brought into CC Amstel is subject to safety checks by CC Amstel staff. All mains-connected electrical equipment must comply with European safety standards.

Lighting equipment rigged overhead must be secured with a safety chain or similar. Overhead equipment (including scenery) must be rigged by a qualified rigger, using appropriately certified equipment.

Scenery and large props must be of a fire retardant fabric or treated with a fire retardant. A certificate of such treatment must be produced on request. Polystyrene and other such materials that cannot be treated with fire retardant are not permitted.

Entrances and emergency exits must, by law, be kept clear of scenery. For the use of open fire a permit is needed from the local fire department, to be applied for at least 2 weeks in advance. The technical staff can help to obtain the permit.

Pyrotechnics can only be done by a registered pyrotechnician. The procedure to obtain a state permit can take 8 weeks or more.

In accordance with the Dutch legislation a written risk assessment is required for all events, to be presented at least a week in advance.

CC Amstel takes all care, but no responsibility for the loss or damage of any visitor's property, including personal belongings. Artists and technicians are encouraged to refrain from bringing personal belongings not required for the event.

The use of alcohol and drugs during working hours is forbidden by law. Smoking is not permitted in the entire building.

Pricelist for rentals CC Amstel Prices ex VAT. More days or larger amounts might lower the prices

- Beamer Panasonic PT-DZ780 a day € 40,-
- Beamer Epson a day € 25,-
- Beamscreen 4x2,75m a day € 25,-
- Headset or handheld mike per piece/a day € 15,-
- Smoke or Hazer a day € 10,-
- Marley place or remove € 40,-
- Tuning piano (if required) € 65,-
- Fire retardant, per liter € 20,-
- Tape rol zwart of wit € 12,50

When wanted, we can assist or advice on stuff needed for your show, for instance video or soundequipment. Just ask.

Dinerbreak for technicians is from 17.00 to 19.00. If work continues during this timeframe a dinerfee for the workers will be applied. That will cost €15,-- per technician (tax included).

Congratulations, you've made it, right up to the end of the technical specifications! Thanks for your patience. We hope to see you soon.

Staff and crew
cc Amstel